


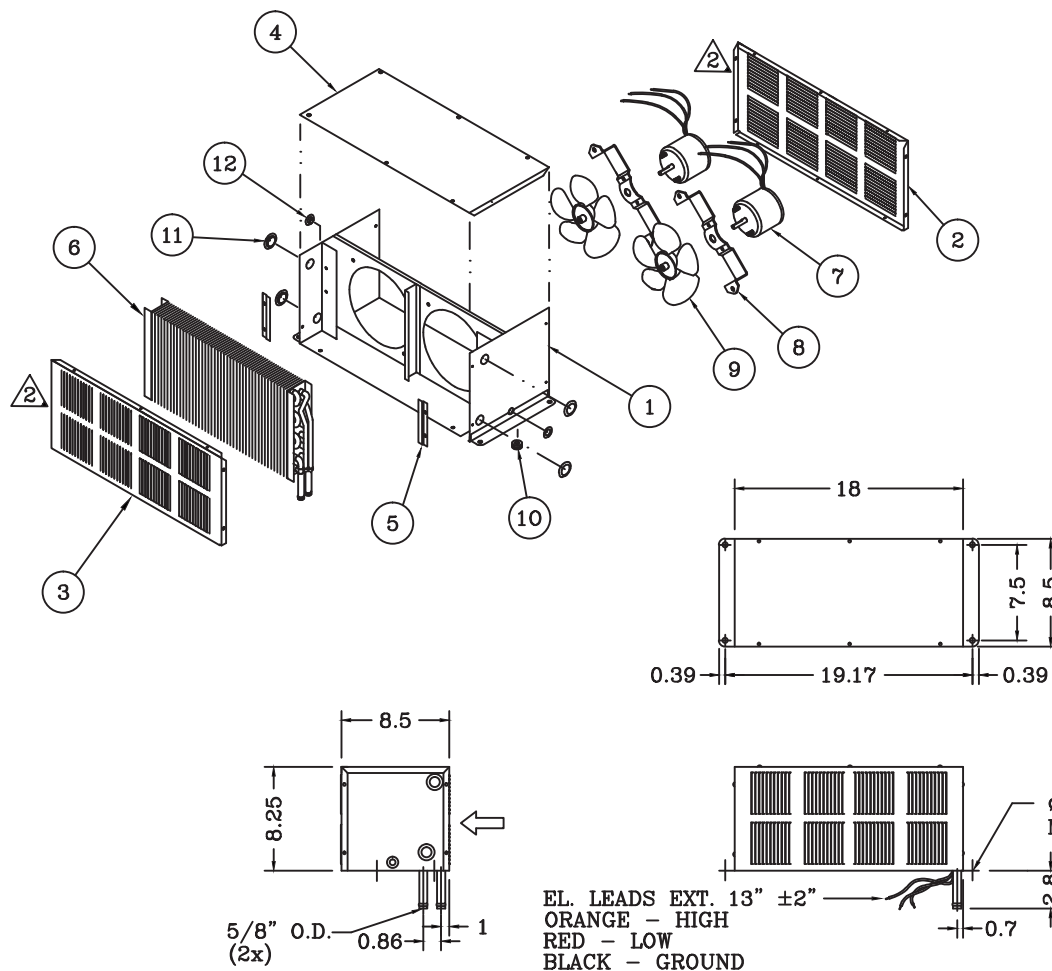

SPECIFICATIONS:

HEATING	-42000 BTU/H (AT 150°F T.D)
AIRFLOW	-500 CFM
CURRENT	-LOW SPEED 6.4 AMPS @13.5V
	-HIGH SPEED 12.2 AMPS @13.5V
WEIGHT	-18.5 LBS.

2-SPEED OPERATED MOTORS

CASING MADE OF 18GA. CRS. AND FINISHED IN BLACK SEMI-GLOSS EPOXY POWDER COAT.

12	2	SNAP IN PLUG
11	2	SNAP IN PLUG
10	1	GROMMET
9	2	FAN
8	2	MOTOR BRACKET
7	2	MOTOR 12V
6	1	HEATER COIL
5	2	COIL SUPPORT
4	1	COVER
3	1	FRONT
2	1	GRILL
1	1	CASING
SYM	PCS	DESCRIPTION

NUMERO DE PIÈCE/PART NUMBER	DESCRIPTION			
805-529	Chaufferette 12V - 11.6 Amp / Heater 12V - 5.8 Amp			
DESSIN PAR/DRAWING BY	BTU - CFM		CONNECTION	
Jimexs	42,000 BTU - 500 CFM		En dessous / Bottom	
JIMEXS.COM / INFO@JIMEXS.COM	DATE	FEUILLE/SHEET	ÉCHELLE/SCALE	PROJECTIONS
	2015-08-07	1/1	NAE	

