

J-LITE OFF-ROAD



www.jlite-offroad.com



CATALOG 451




TRIPLE ROW LIGHT BARS
P. 4-5



DOUBLE ROW LIGHT BARS
P. 6-7

J-LITE OFF-ROAD

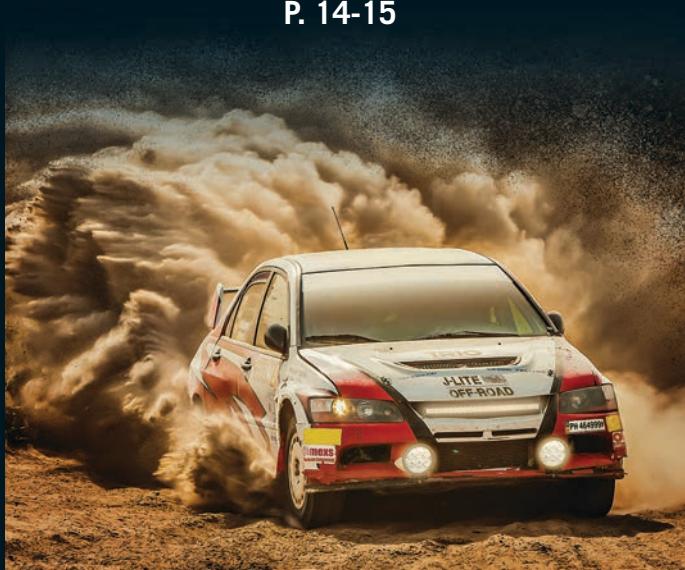

SINGLE ROW FIXED LIGHT BARS
P. 14-15



INTERCONNECTABLE LIGHT BARS
P. 16



DOUBLE ROW CURVED LIGHT BARS
P. 8-9




SINGLE ROW LIGHT BARS
P. 10-11



**SINGLE ROW
CURVED LIGHT BARS**
P. 12-13

LED WORK LAMPS
P. 17-34

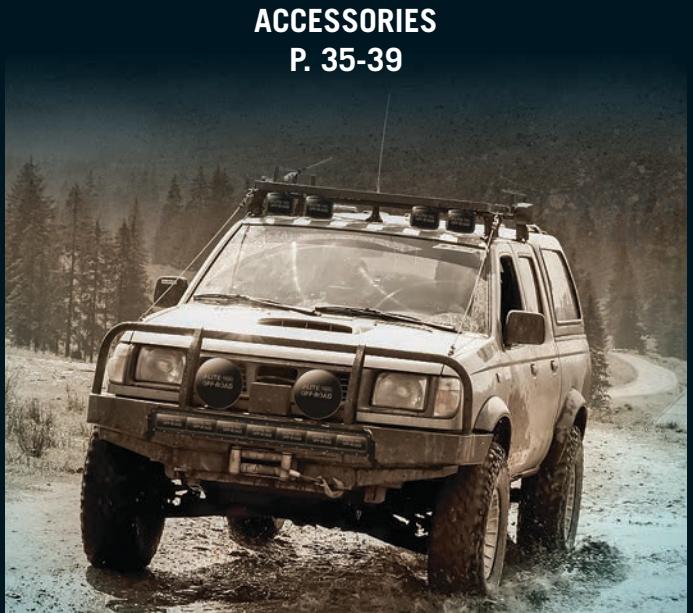

ACCESSORIES
P. 35-39

LED LIGHT BARS

TRIPLE ROW LIGHT BARS

J-LITE
OFF-ROAD

TRIPLE ROW LIGHT BARS



OPERATING VOLTAGE: 10-30V DC

WATERPROOF RATE: IP67

COLOR TEMPERATURE: 5000K -5500K

MATERIAL: Diecast aluminum housing

LENS MATERIAL: PC

MOUNTING BRACKET: Aluminum alloy


WARRANTY: 1 year

CERTIFICATE(S): IP67

See p. 36-37 for appropriate lens cover

OSRAM 

IP67
WATERPROOF






LED LIGHT BARS

TRIPLE ROW LIGHT BARS

60 WATTS

LED: 20 OSRAM diodes
WATTS/DIODES: 3 Watts
WIRING: Female "DT" plug
CURRENT DRAW: 3.9A@12V, 1.9A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 12 in.

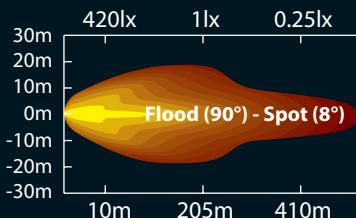


709-317
5400 LUMENS



120 WATTS

LED: 40 OSRAM diodes
WATTS/DIODES: 3 Watts
WIRING: Female "DT" plug
CURRENT DRAW: 8.3A@12V, 3.7A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 21 in.

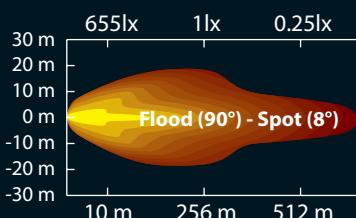


709-327
10800 LUMENS



180 WATTS

LED: 60 OSRAM diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 10.8A@12V, 5.5A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 31 in.

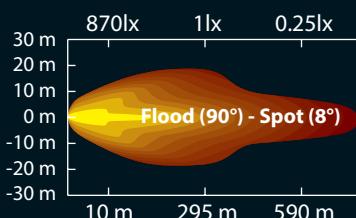


709-337
16200 LUMENS



240 WATTS

LED: 80 OSRAM diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 15.0A@12V, 7.6A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 41 in.

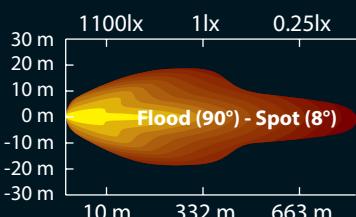


709-347
21600 LUMENS



300 WATTS

LED: 100 OSRAM diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 19.3A@12V, 9.6A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 51 in.

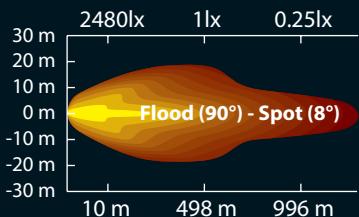

709-357
27000 LUMENS



LED LIGHT BARS

DOUBLE ROW LIGHT BARS

J-LITE
OFF-ROAD

DOUBLE ROW LIGHT BARS



OPERATING VOLTAGE: 10-30V DC

WATERPROOF RATE: IP67

COLOR TEMPERATURE: 6000K

MATERIAL: Diecast aluminum housing

LENS MATERIAL: PC

MOUNTING BRACKET: Aluminum alloy

WARRANTY: 1 year

CERTIFICATE(S): EMC, IP67

See p. 36-37 for appropriate lens cover


CREE

IP67
WATERPROOF




36 WATTS

LED: 12 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: Female "DT" plug
CURRENT DRAW: 2.3A@12V, 1.1A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 7.5 in.

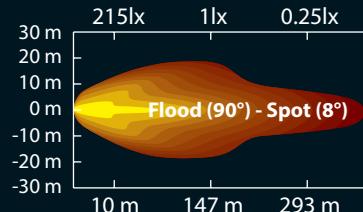


72 WATTS

LED: 24 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: "DT" plug
CURRENT DRAW: 4.4A@12V, 2.2A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 13.5 in.

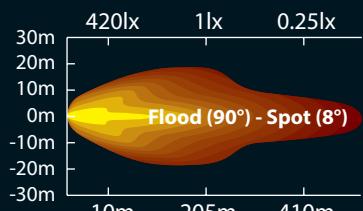


120 WATTS

LED: 40 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: "DT" plug
CURRENT DRAW: 8.6A@12V, 4.0A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 21.5 in.

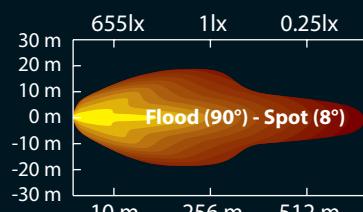


180 WATTS

LED: 60 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 12.7A@12V, 5.7A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 31.5 in.

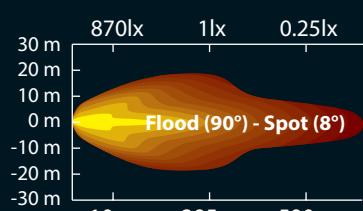


240 WATTS

LED: 80 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 16.0A@12V, 6.8A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 41.5 in.

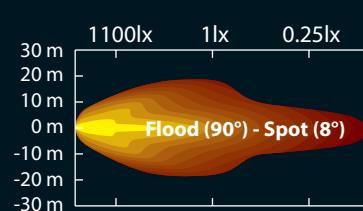

288 WATTS

LED: 96 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 17.1A@12V, 8.0A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 48.5 in.

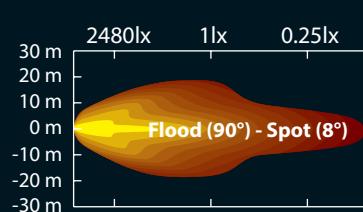

709-107

3240 LUMENS



709-117

6480 LUMENS



709-127

10800 LUMENS



709-137

16200 LUMENS



709-147

21600 LUMENS



709-157

25920 LUMENS



LED LIGHT BARS

DOUBLE ROW CURVED LIGHT BARS

J-LITE
OFF-ROAD

DOUBLE ROW CURVED LIGHT BARS



OPERATING VOLTAGE: 10-30V DC

WATERPROOF RATE: IP67

COLOR TEMPERATURE: 6000K

MATERIAL: Diecast aluminum housing

LENS MATERIAL: PC

MOUNTING BRACKET: Aluminum alloy

WARRANTY: 1 year

CERTIFICATE(S): EMC, IP67

See p. 36-37 for appropriate lens cover

CREE®


emc IP67
WATERPROOF



DOUBLE ROW CURVED LIGHT BARS

180 WATTS

LED: 60 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 12.7A@12V, 5.7A@24V
BEAM: Flood (90°) – Spot (8°)
SIZE: 31.5 in.

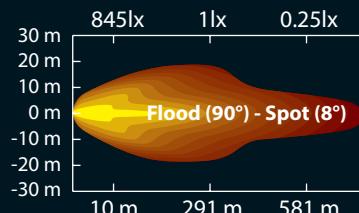


709-161

16200 LUMENS



240 WATTS

LED: 80 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 16.0A@12V, 6.8A@24V
BEAM: Flood (90°) – Spot (8°)
SIZE: 41.5 in.

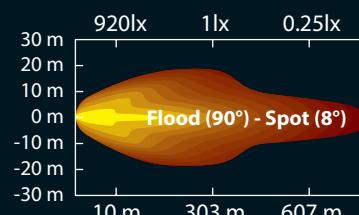


709-171

21600 LUMENS



288 WATTS

LED: 96 CREE diodes
WATTS/DIODES: 3 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 17.1A@12V, 8.0A@24V
BEAM: Flood (90°) – Spot (8°)
SIZE: 49.5 in.

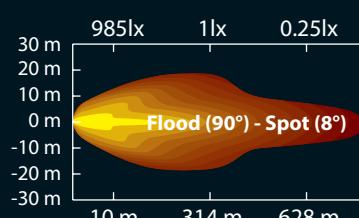

709-181

25920 LUMENS



LED LIGHT BARS

SINGLE ROW LIGHT BARS

J-LITE
OFF-ROAD

SINGLE ROW LIGHT BARS

OPERATING VOLTAGE: 10-30V DC

WATERPROOF RATE: IP67

COLOR TEMPERATURE: 6000K

MATERIAL: Diecast aluminum housing

LENS MATERIAL: PC

MOUNTING BRACKET: Aluminum alloy


WARRANTY: 1 year

CERTIFICATE(S): EMC, IP67

See p. 36-37 for appropriate lens cover

CREE®


emc IP67
WATERPROOF



SINGLE ROW LIGHT BARS

60 WATTS

LED: 6 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: 2-wire direct
CURRENT DRAW: 4.3A@12V, 2.1A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 14 in.

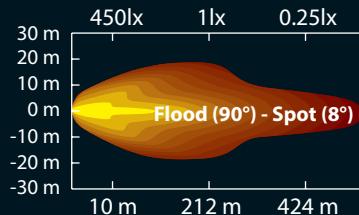


709-207

5400 LUMENS



100 WATTS

LED: 10 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: Female "DT" plug
CURRENT DRAW: 7.1A@12V, 3.5A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 22 in.

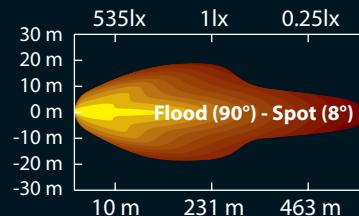


709-217

9000 LUMENS



140 WATTS

LED: 14 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: Female "DT" plug
CURRENT DRAW: 11.0A@12V, 4.9A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 30.5 in.

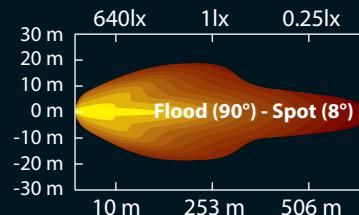


709-227

12600 LUMENS



200 WATTS

LED: 20 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 14.2A@12V, 7.0A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 42.5 in.

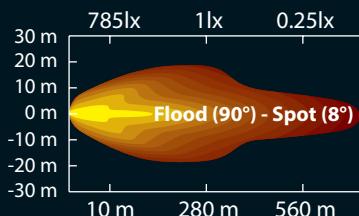


709-237

18000 LUMENS



240 WATTS

LED: 24 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: Female "ATP" plug
CURRENT DRAW: 18.0A@12V, 7.4A@24V
BEAM: Flood (90°) - Spot (8°)
SIZE: 49.5 in.

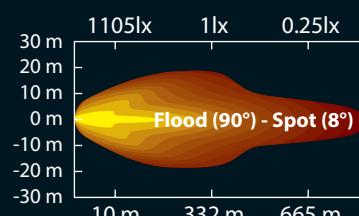

709-247

21600 lumens



LED LIGHT BARS

SINGLE ROW CURVED LIGHT BARS

J-LITE
OFF-ROAD

SINGLE ROW CURVED LIGHT BARS



OPERATING VOLTAGE: 10-30V DC

WATERPROOF RATE: IP67

COLOR TEMPERATURE: 6000K

MATERIAL: Diecast aluminum housing

LENS MATERIAL: PC

MOUNTING BRACKET: Aluminum alloy


WARRANTY: 1 year

CERTIFICATE(S): EMC, IP67

See p. 36-37 for appropriate lens cover

CREE®


emc IP67
WATERPROOF



SINGLE ROW CURVED LIGHT BARS

60 WATTS

LED: 6 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: 2-wire direct
CURRENT DRAW: 4.3A@12V, 2.1A@24V
BEAM: Flood (90°) – Spot (8°)
SIZE: 13.5 in.

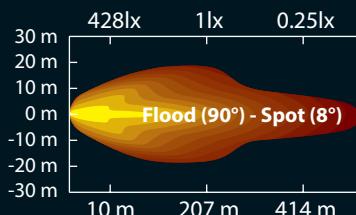


709-251
5400 LUMENS



100 WATTS

LED: 10 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: 2-wire direct
CURRENT DRAW: 7.1A@12V, 3.5A@24V
BEAM: Flood (90°) – Spot (8°)
SIZE: 21.5 in.

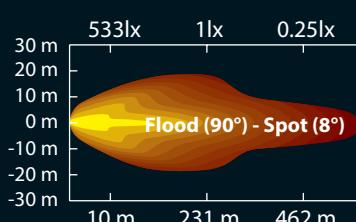


709-261
9000 LUMENS



140 WATTS

LED: 14 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: 2-wire direct
CURRENT DRAW: 11.0A@12V, 4.9A@24V
BEAM: Flood (90°) – Spot (8°)
SIZE: 29.5 in.

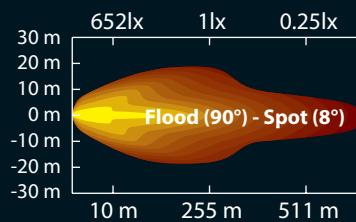


709-271
12600 LUMENS



200 WATTS

LED: 20 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: 2-wire direct
CURRENT DRAW: 14.2A@12V, 7.0A@24V
BEAM: Flood (90°) – Spot (8°)
SIZE: 41.5 in.

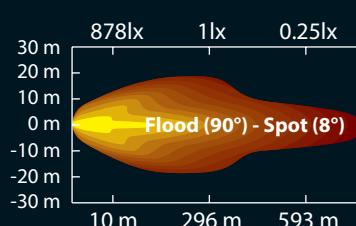


709-281
18000 LUMENS



240 WATTS

LED: 24 CREE diodes
WATTS/DIODES: 10 Watts
WIRING: 2-wire direct
CURRENT DRAW: 18.0A@12V, 7.4A@24V
BEAM: Flood (90°) – Spot (8°)
SIZE: 49.5 in.

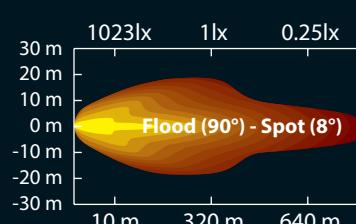

709-291
21600 LUMENS



LED LIGHT BARS

SINGLE ROW FIXED LIGHT BARS

J-LITE
OFF-ROAD

FIXED SINGLE ROW LIGHT BARS



OPERATING VOLTAGE: 10-30V DC

WATERPROOF RATE: IP67

COLOR TEMPERATURE: 6000K

MATERIAL: Diecast aluminum housing

LENS MATERIAL: PC

MOUNTING BRACKET: Zinc alloy


WARRANTY: 1 year

CERTIFICATE(S): CE, RoHS, IP67

See p. 36-37 for appropriate lens cover

CREE


CE RoHS Compliant IP67 WATERPROOF

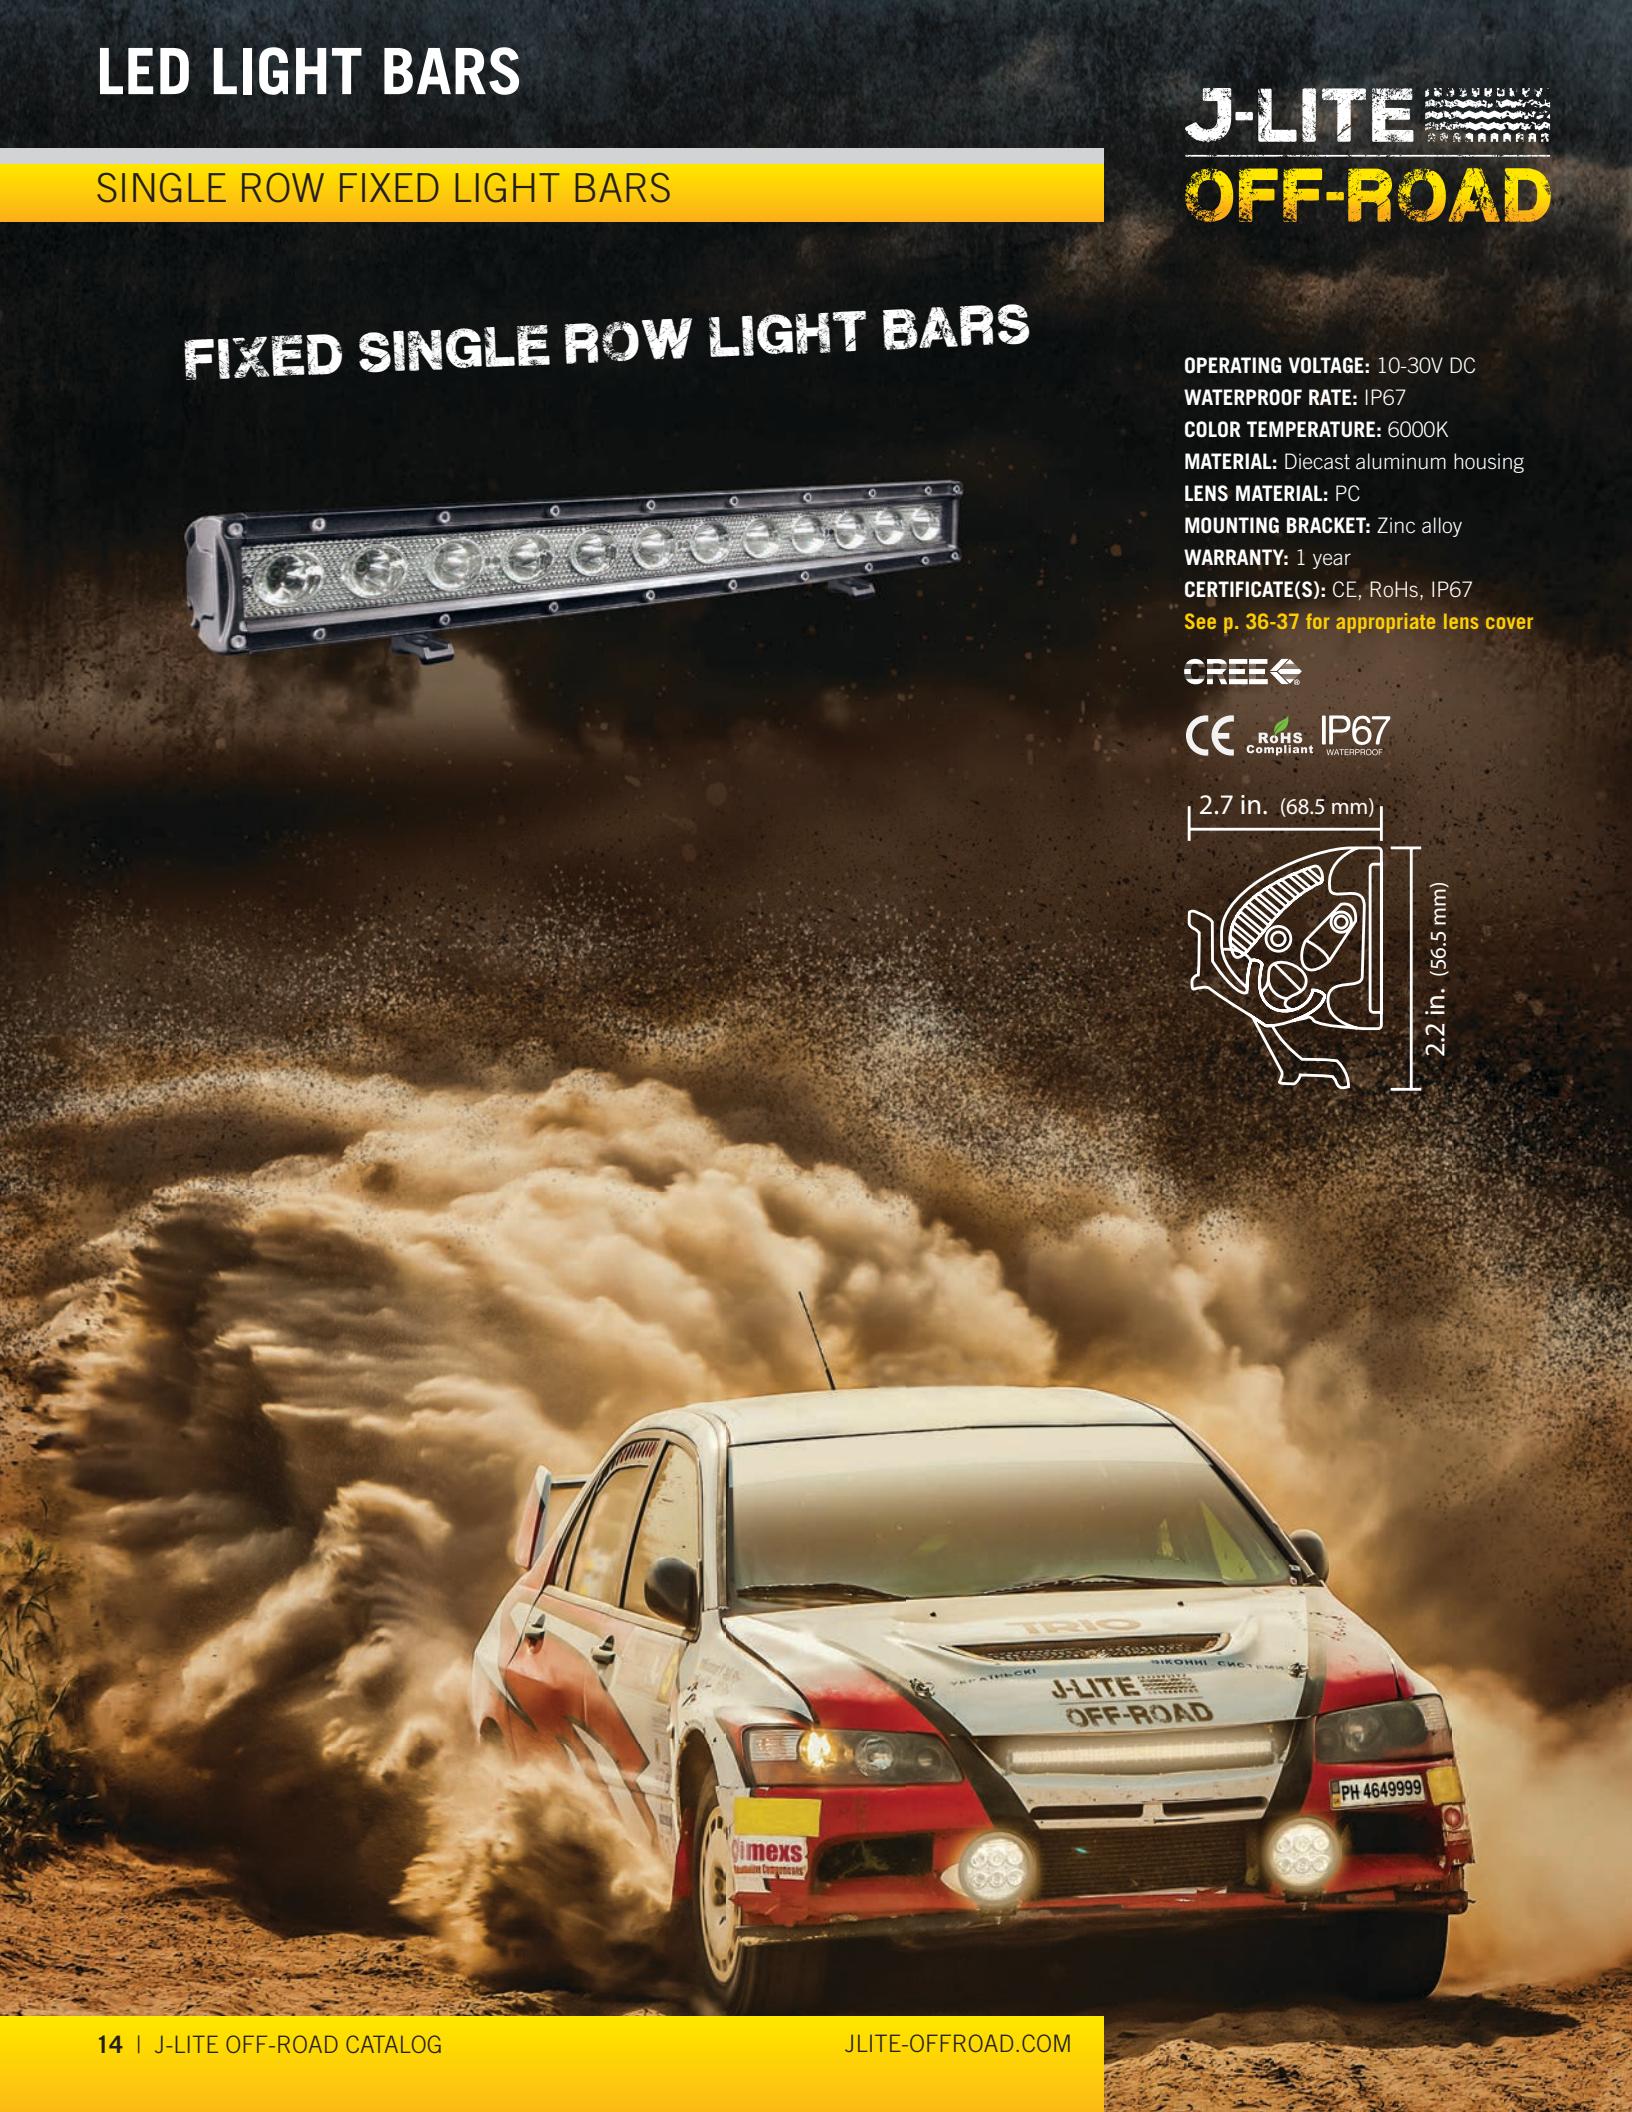

SINGLE ROW FIXED LIGHT BARS

30 WATTS

LED: 6 CREE diodes
WATTS/DIODES: 5 Watts
WIRING: 2-wire direct
CURRENT DRAW: 2.4A@12V, 1.1A@24V
BEAM: Flood (120°) - Spot (8°)
SIZE: 11 in.

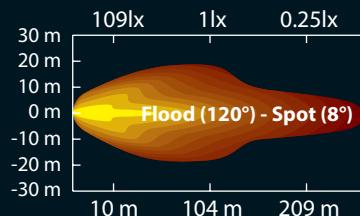


709-011

2700 LUMENS



60 WATTS

LED: 12 CREE diodes
WATTS/DIODES: 5 Watts
WIRING: 2-wire direct
CURRENT DRAW: 4.8A@12V, 2.2A@24V
BEAM: Flood (120°) - Spot (8°)
SIZE: 20.5 in.

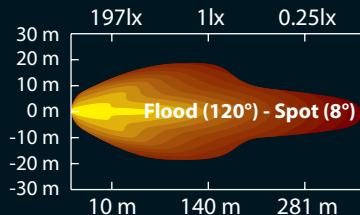


709-021

5400 LUMENS



90 WATTS

LED: 18 CREE diodes
WATTS/DIODES: 5 Watts
WIRING: 2-wire direct
CURRENT DRAW: 7.2A@12V, 3.4A@24V
BEAM: Flood (120°) - Spot (8°)
SIZE: 30 in.

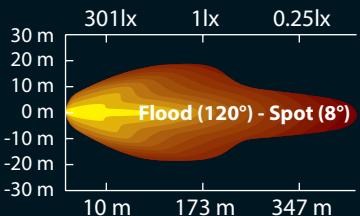


709-031

8100 LUMENS



120 WATTS

LED: 24 CREE diodes
WATTS/DIODES: 5 Watts
WIRING: 2-wire direct
CURRENT DRAW: 9.8A@12V, 4.9A@24V
BEAM: Flood (120°) - Spot (8°)
SIZE: 39.5 in.

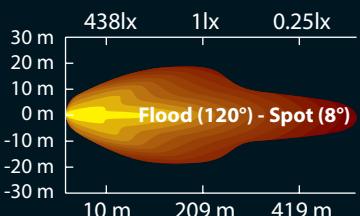

709-041

10800 LUMENS



LED LIGHT BARS

INTERCONNECTABLE LIGHT BARS

INTERCONNECTABLE LIGHT BARS



OPERATING VOLTAGE: 10-30V DC

WATERPROOF RATE: IP67

COLOR TEMPERATURE: 6000K

MATERIAL: Zinc alloy


LENS MATERIAL: PMMA

MOUNTING BRACKET: Zinc alloy

WARRANTY: 1 year

CERTIFICATE(S): CE, RoHs, IP67

**EASY CONNECT!
MAKE YOUR OWN SETUP**



30 WATTS

LED: 18 CREE diodes


LUMEN: 2700 LM

CURRENT DRAW: 2.4A@12V, 1.2A@24V

BEAM: Spot (5°) or Flood (60°)

SIZE: 7 in.

709-001

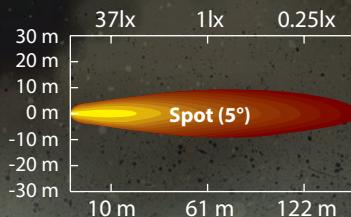


CREE

CE RoHS Compliant **IP67** WATERPROOF



709-003

Flood (60°)

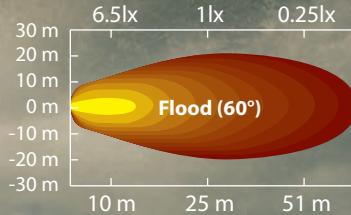

J-LITE OFF-ROAD

LED WORK LAMPS

LED WORK LAMPS






LED WORK LAMPS

WORK LAMPS

J-LITE
OFF-ROAD



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67, Emark

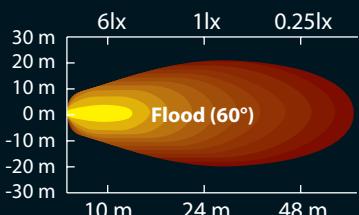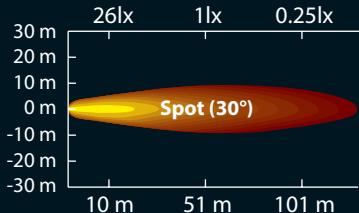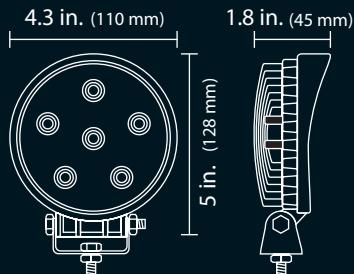



EPISTAR

CE RoHS Compliant IP67 E WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-651	4.3 in.	6 Epistar diodes	3 Watts	18 Watts	1440 LM	Spot (30°)	1.5A@12V, 0.7A@24V
709-652	4.3 in. (chrome ver.)	6 Epistar diodes	3 Watts	18 Watts	1440 LM	Spot (30°)	1.5A@12V, 0.7A@24V
709-653	4.3 in.	6 Epistar diodes	3 Watts	18 Watts	1440 LM	Flood (60°)	1.5A@12V, 0.7A@24V



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 3000K - 3200K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, ROHS, IP67, Emark
See p. 36-37 for appropriate lens cover

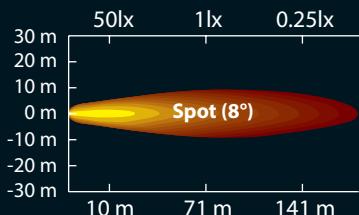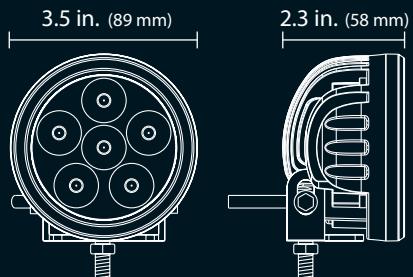


EPISTAR

EMC CE RoHS Compliant IP67 E WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-591	3.5 in.	6 Epistar diodes	3 Watts	18 Watts	1440 LM	Spot (8°)	1.1A@12V, 0.6A@24V

LED WORK LAMPS

J-LITE
OFF-ROAD

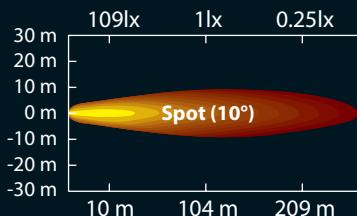


OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67




CREE


CE **RoHS Compliant** **IP67** WATERPROOF

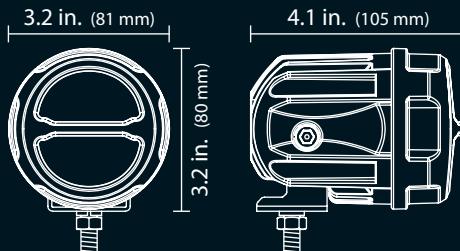

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-741	3.2 in.	4 CREE diodes	5 Watts	20 Watts	1800 LM	Spot (10°)	1.3A@12V, 0.7A@24V

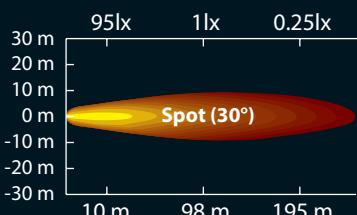

OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PMMA
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

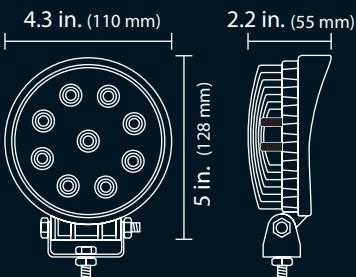

EPISTAR

EMC **CE** **RoHS Compliant** **IP67** WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-682	4.3 in.	9 Epistar diodes	3 Watts	27 Watts	2160 LM	Spot (30°)	1.8A@12V, 0.9A@24V



LED WORK LAMPS

WORK LAMPS

J-LITE
OFF-ROAD



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

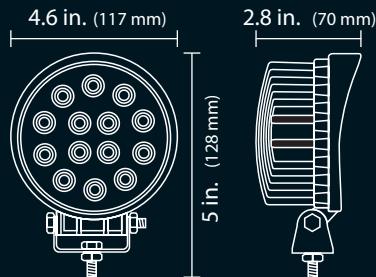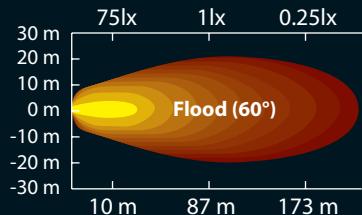



EPISTAR

emc CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-713	4.6 in.	14 Epistar diodes	3 Watts	42 Watts	3360 LM	Flood (60°)	3.0A@12V, 1.7@24V




OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

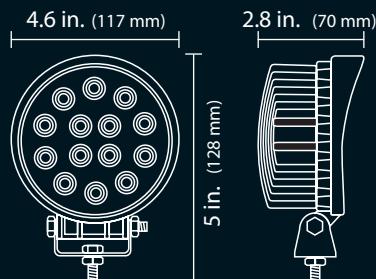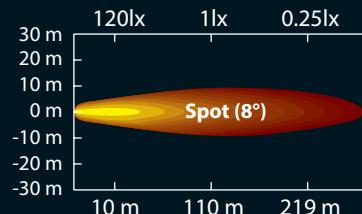


EPISTAR

emc CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-581	4.6 in.	14 Epistar diodes	3 Watts	42 Watts	3360 LM	Spot (8°)	3.0A@12V, 1.7A@24V

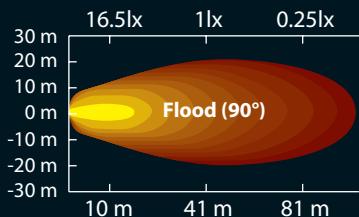


OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67

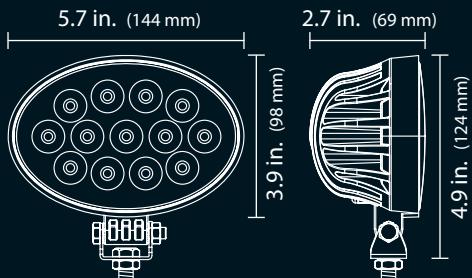


CREE

CE **RoHS** Compliant **IP67** WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-763	5.7 in. x 4.9 in.	13 CREE diodes	3 Watts	39 Watts	3510 LM	Flood (90°)	2.5A@12V, 1.3A@24V

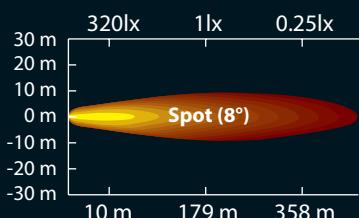

OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67
See p. 36-37 for appropriate lens cover

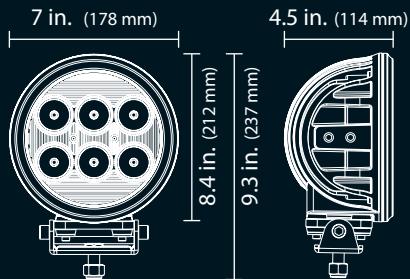

CREE

CE **RoHS** Compliant **IP67** WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-561	7 in.	6 CREE diodes	10 Watts	60 Watts	5400 LM	Spot (8°)	5.4A@12V, 2.5A@24V



LED WORK LAMPS

WORK LAMPS



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67, Emark

J-LITE
OFF-ROAD

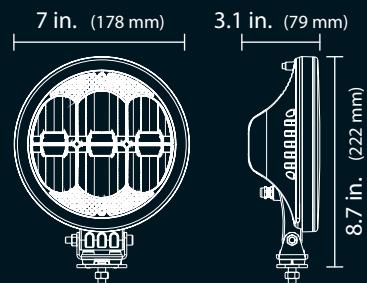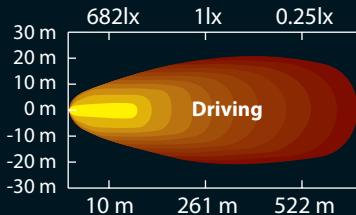



CREE

CE RoHS Compliant IP67 E WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-851	7 in.	6 CREE diodes	10 Watts	60 Watts	5400 LM	Driving	3.6A@12V, 1.8A@24V



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67, Emark
See p. 36-37 for appropriate lens cover

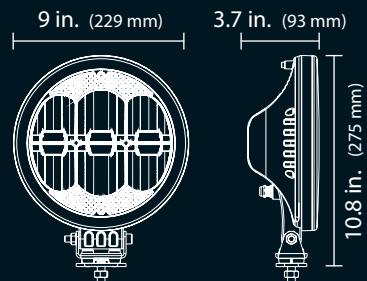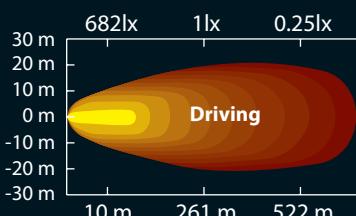


CREE

CE RoHS Compliant IP67 E WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-861	9 in.	6 CREE diodes	10 Watts	60 Watts	5400 LM	Driving	3.6A@12V, 1.8A@24V

J-LITE


OFF-ROAD

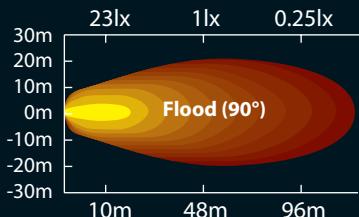


OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67

CREE®

CE RoHS Compliant IP67 WATERPROOF

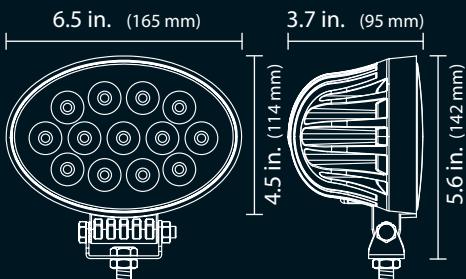

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-753	6.5 in. x 5.6 in.	13 CREE diodes	5 Watts	65 Watts	5850 LM	Flood (90°)	3.8A@12V, 1.9@24V

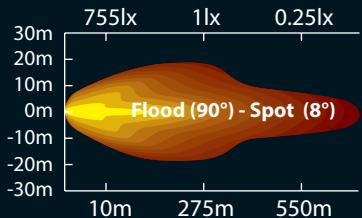


OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

See p. 36-37 for appropriate lens cover

CREE®

EMC CE RoHS Compliant IP67 WATERPROOF

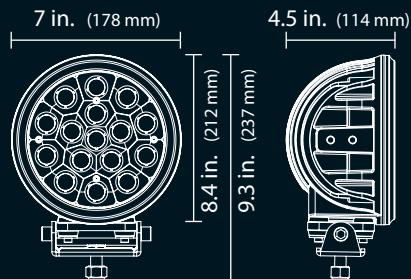

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-557	7 in.	16 CREE diodes	5 Watts	80 Watts	7200 LM	Sp. (8°) Fl. (90°)	4.8A@12V, 2.4A@24V



LED WORK LAMPS

WORK LAMPS

J-LITE
OFF-ROAD



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PMMA
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

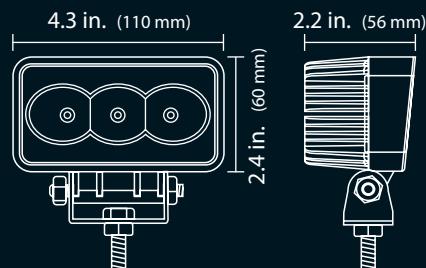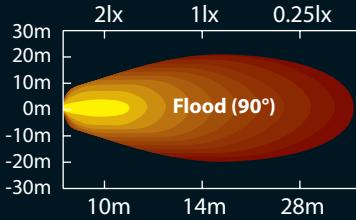



EPISTAR

EMC CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-793	4.3 in. x 2.4 in.	3 Epistar diodes	3 Watts	9 Watts	720 LM	Flood (90°)	0.7A@12V, 0.4A@24V



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67

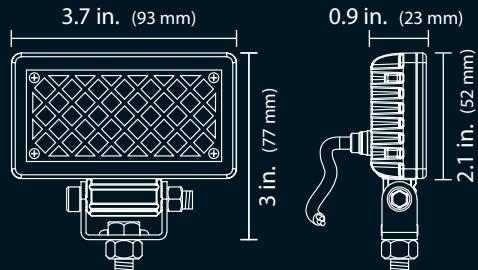
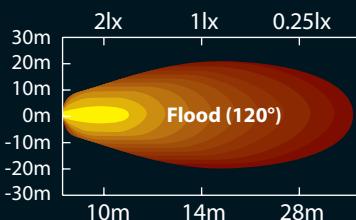


MICRO LED

CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-823	3.7 in. x 3 in.	33 micro LED chips	0.2 Watts	6.6 Watts	726 LM	Flood (120°)	0.5A@12V, 0.3A@24V

J-LITE OFF-ROAD

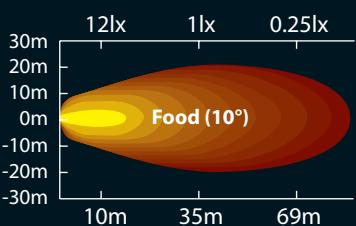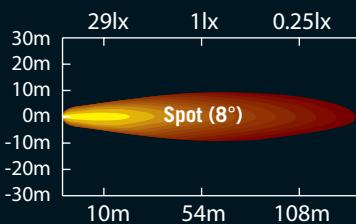


CREE®



CE ROHS Compliant IP67 WATERPROOF

OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: Toughened glass
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67

WORK LAMPS

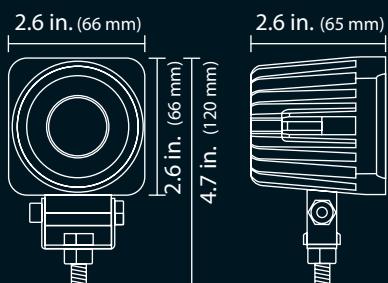


PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-621	2.6 in. x 2.6 in.	1 CREE diodes	10 Watts	10 Watts	900 LM	Spot (8°)	0.9A@12V, 0.4A@24V
709-623	2.6 in. x 2.6 in.	1 CREE diodes	10 Watts	10 Watts	900 LM	Flood (40°)	0.9A@12V, 0.4A@24V

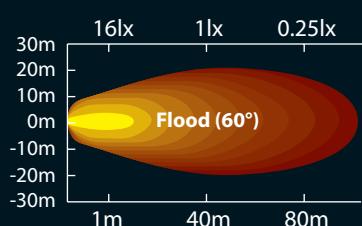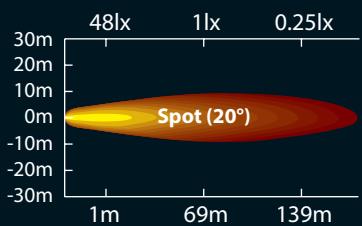

EPISTAR

CE ROHS Compliant IP67 WATERPROOF

OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: Toughened Glass
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67

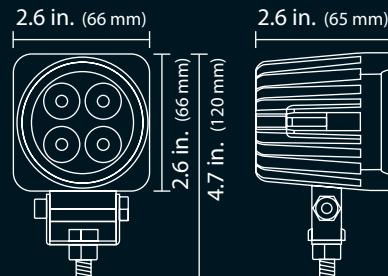

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-782	2.6 in. x 2.6 in.	4 Epistar diodes	3 Watts	12 Watts	960 LM	Spot (20°)	1A@12V, 0.5A@24V
709-783	2.6 in. x 2.6 in.	4 Epistar diodes	3 Watts	12 Watts	960 LM	Flood (60°)	1A@12V, 0.5A@24V



LED WORK LAMPS

WORK LAMPS

J-LITE
OFF-ROAD



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67, Emark
 See p. 36-37 for appropriate lens cover

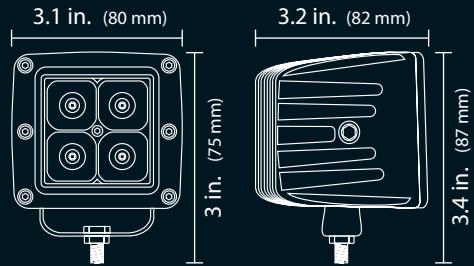
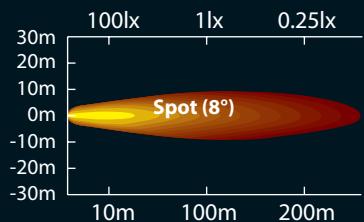


CREE 
 EMC  CE  RoHS Compliant  IP67  WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-511	3.1 in. x 3 in.	4 CREE diodes	3 Watts	12 Watts	1080 LM	Spot (8°)	1.3A@12V, 0.7A@24V





OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67, Emark

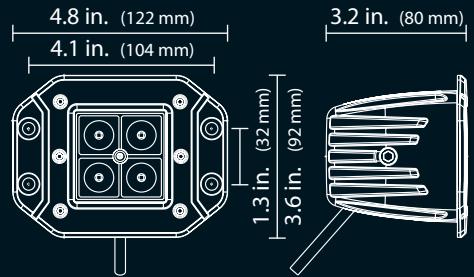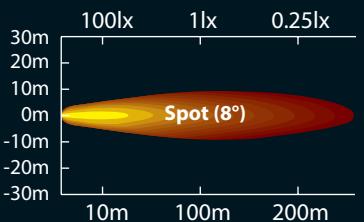

CREE 
 CE  RoHS Compliant  IP67  WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-521	4.8 in. x 3.6 in.	4 CREE diodes	3 Watts	12 Watts	1080 LM	Spot (8°)	1.3A@12V, 0.7A@24V


J-LITE OFF-ROAD

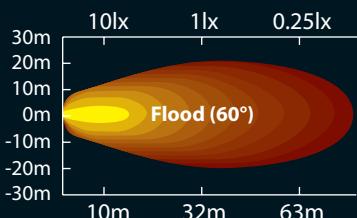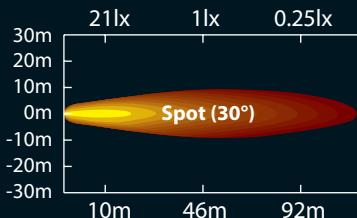


PISTAR



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67, E-mark

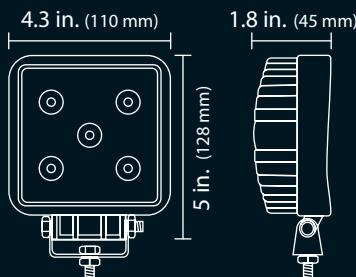


PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-631	4.3 in. x 5 in.	5 Epistar diodes	3 Watts	15 Watts	1200 LM	Spot (30°)	1.3A@12V, 0.7A@24V
709-633	4.3 in. x 5 in.	5 Epistar diodes	3 Watts	15 Watts	1200 LM	Flood (60°)	1.3A@12V, 0.7A@24V

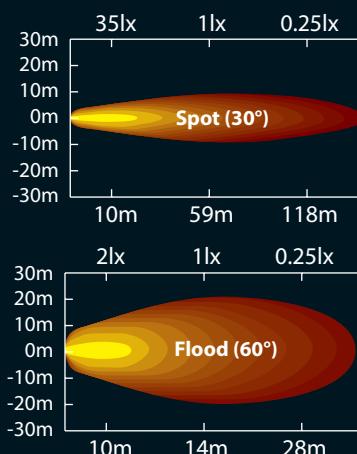

PISTAR



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67, E-mark

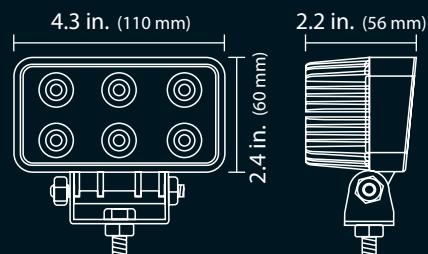

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-802	4.3 in. x 2.4 in.	6 Epistar diodes	3 Watts	18 Watts	1440 LM	Spot 30°	1.4A@12V, 0.8A@24V
709-803	4.3 in. x 2.4 in.	6 Epistar diodes	3 Watts	18 Watts	1440 LM	Flood (60°)	1.4A@12V, 0.8A@24V



LED WORK LAMPS

WORK LAMPS

J-LITE
OFF-ROAD



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67

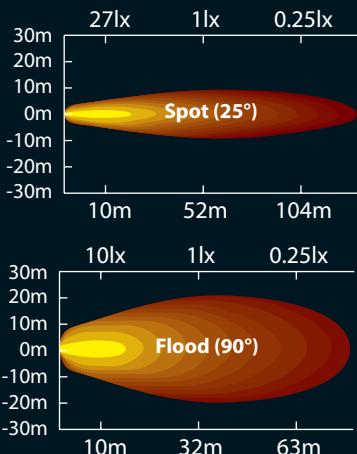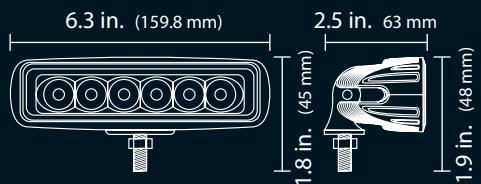

EPISTAR



CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-501	6.3 in. x 1.8 in.	6 Epistar diodes	3 Watts	18 Watts	1440 LM	Spot (25°)	1.4A@12V, 0.7A@24V
709-503	6.3 in. x 1.8 in.	6 Epistar diodes	3 Watts	18 Watts	1440 LM	Flood (90°)	1.4A@12V, 0.7A@24V



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): IP67

See p. 36-37 for appropriate lens cover

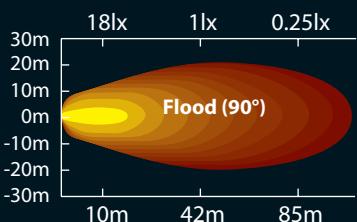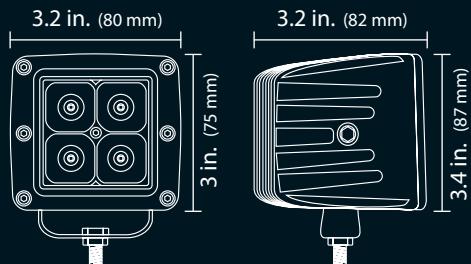


CREE


IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-533	3.2 in. x 3 in.	6 CREE diodes	3 Watts	18 Watts	1620 LM	Flood (90°)	1.4A@12V, 0.7A@24V

J-LITE OFF-ROAD

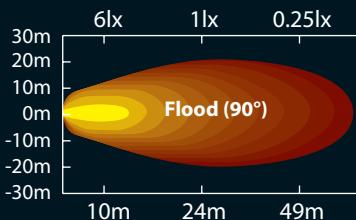


OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

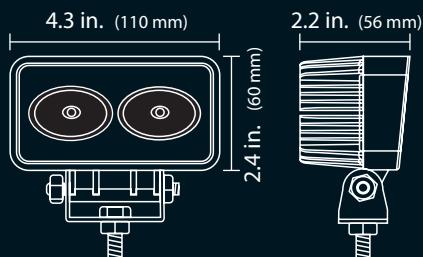


CREE®

emc CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-813	4.3 in. x 2.4 in.	2 CREE diodes	10 Watts	20 Watts	1800 LM	Flood (90°)	1.5A@12V, 0.8A@24V

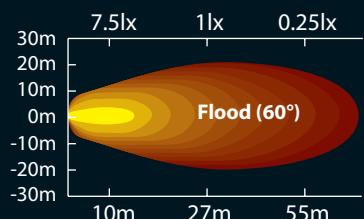

OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

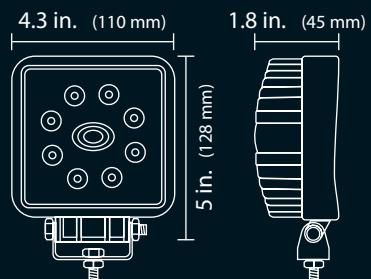

APISTAR


emc CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-673	4.3 in. x 5 in.	8 Epistar diodes	3 Watts	24 Watts	1920 LM	Flood (60°)	1.7A@12V, 0.9A@24V


LED WORK LAMPS

WORK LAMPS

J-LITE
OFF-ROAD

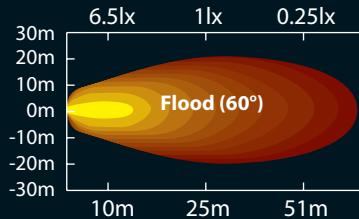


OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PMMA
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, IP67

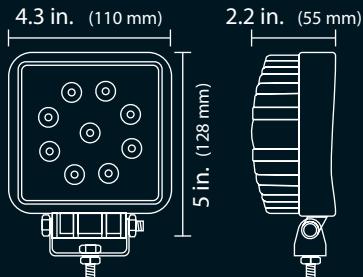


PISTAR

EMC CE IP67
WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-663	4.3 in. x 5 in.	9 Epistar diodes	3 Watts	27 Watts	2160 LM	Flood (60°)	2.0A@12V, 0.9A@24V

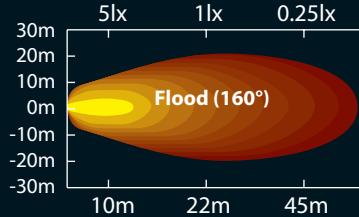

OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, IP67

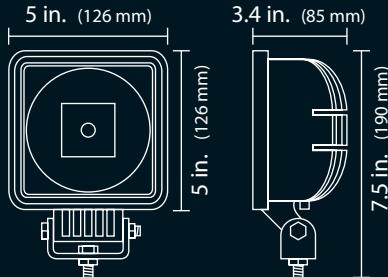


PISTAR

EMC CE IP67
WATERPROOF


PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-773	5 in. x 6.1 in.	30 Epistar diodes	1 Watts	30 Watts	2400 LM	Flood (160°)	2.5A@12V, 1.3A@24V

J-LITE OFF-ROAD

LED WORK LAMPS

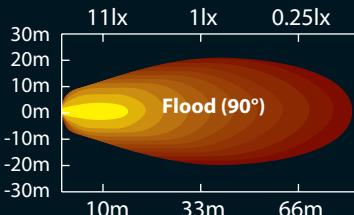


OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, ROHS, IP67

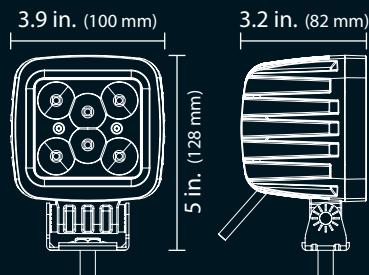



CREE®

emc CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-703	3.9 in. x 5 in.	6 CREE diodes	5 Watts	30 Watts	2700 LM	Flood (90°)	2.3A@12V, 1.1A@24V

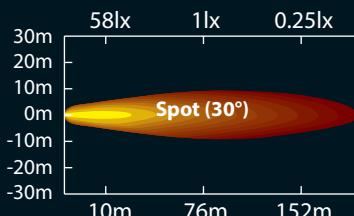

OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

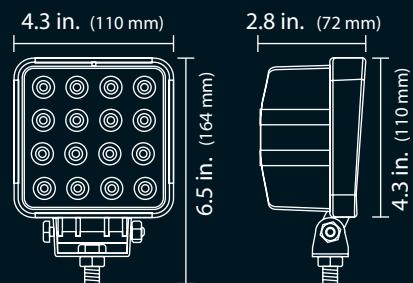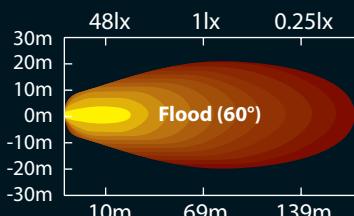

EPISTAR

emc CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-601	4.3 in. x 4.3 in.	16 Epistar diodes	3 Watts	48 Watts	3840 LM	Spot (30°)	2.4A@12V, 1.7A@24V
709-603	4.3 in. x 4.3 in.	16 Epistar diodes	3 Watts	48 Watts	3840 LM	Flood (60°)	2.4A@12V, 1.7A@24V




LED WORK LAMPS

WORK LAMPS

J-LITE
OFF-ROAD



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67

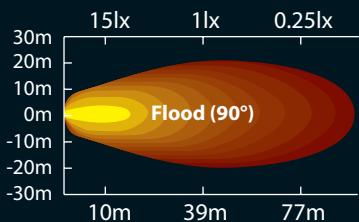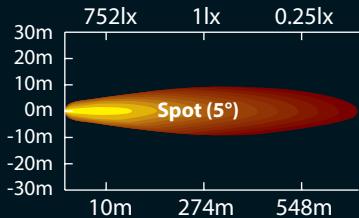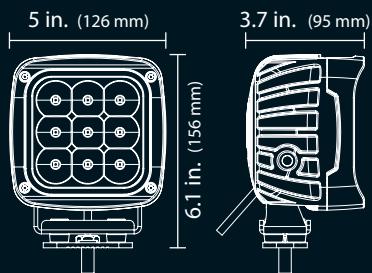



CREE

CE RoHS Compliant IP67
WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-691	5 in. x 6.1 in.	9 CREE diodes	5 Watts	45 Watts	4050 LM	Spot (5°)	3.3A@12V, 1.7A@24V
709-693	5 in. x 6.1 in.	9 CREE diodes	5 Watts	45 Watts	4050 LM	Flood (90°)	3.3A@12V, 1.7A@24V



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67

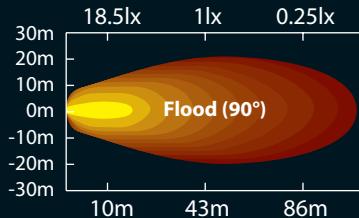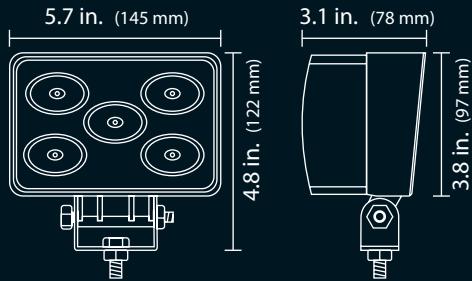


CREE

emc CE RoHS Compliant IP67
WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-723	5.7 in. x 4.8 in.	5 CREE diodes	10 Watts	50 Watts	4500 LM	Flood (90°)	3.6A@12V, 1.8A@24V

J-LITE OFF-ROAD


LED WORK LAMPS

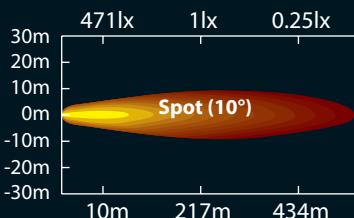


OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67
 See p. 36-37 for appropriate lens cover

CREE

emc CE RoHS Compliant IP67 WATERPROOF

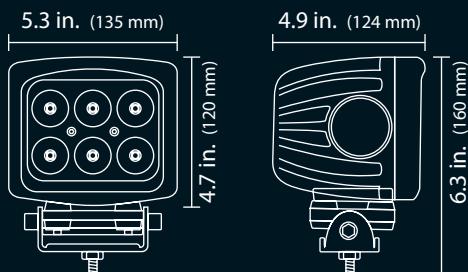


PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-571	5.3 in. x 4.7 in.	6 CREE diodes	10 Watts	60 Watts	5400 LM	Spot (10°)	4.7A@12V, 2.4A@24V

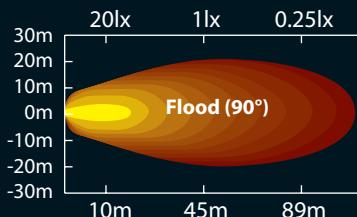

OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67
 See p. 36-37 for appropriate lens cover

CREE

CE RoHS Compliant IP67

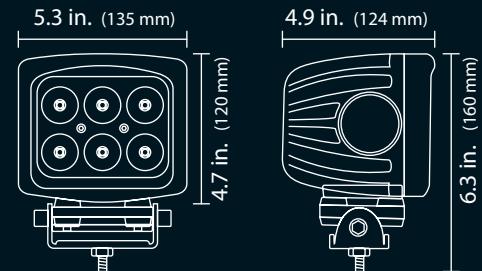

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-733	5.3 in. x 4.7 in.	6 CREE diodes	10 Watts	60 Watts	5400 LM	Flood (90°)	4.7A@12V, 2.4A@24V



LED WORK LAMPS

WORK LAMPS

J-LITE
OFF-ROAD



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): EMC, CE, RoHs, IP67
See p. 36-37 for appropriate lens cover

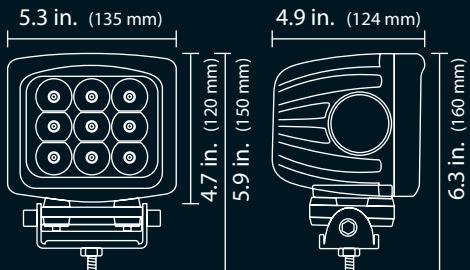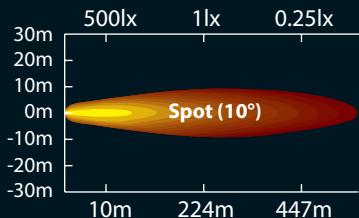



CREE

EMC CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-541	5.3 in. x 4.7 in.	9 CREE diodes	10 Watts	90 Watts	8100 LM	Spot (10°)	6.3A@12V, 3.1A@24V



OPERATING VOLTAGE: 10-30V DC
WATERPROOF RATE: IP67
COLOR TEMPERATURE: 6000K
MATERIAL: Diecast aluminum housing
LENS MATERIAL: PC
MOUNTING BRACKET: Stainless Steel
WARRANTY: 1 year
CERTIFICATE(S): CE, RoHs, IP67
See p. 36-37 for appropriate lens cover

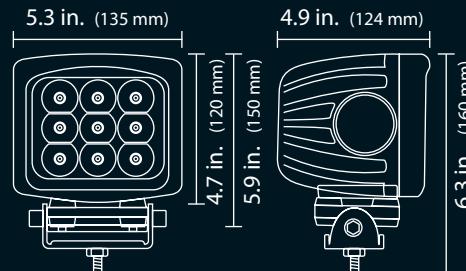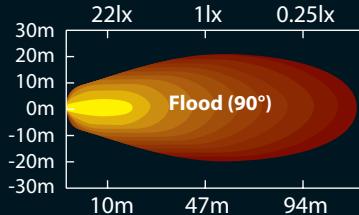

CREE

CE RoHS Compliant IP67 WATERPROOF

PART NUMBER	DIMENSIONS	LED	W / DIODE	LED POWER	LUMEN	BEAM	CURRENT DRAW
709-613	5.3 in. x 4.7 in.	6 CREE diodes	10 Watts	90 Watts	8100 LM	Flood (90°)	6.3A@12V, 3.1A@24V



LENS COVER

WORK LAMP LENS COVER

J-LITE
OFF-ROAD



909-005
Clear



909-015
Clear



909-025
Clear



909-035
Clear



909-045
Clear



909-009
Black



909-019
Black



909-029
Black



909-039
Black



909-049
Black

ACCESSORIES	COLOR	DIMENSION	DESCRIPTION	MATERIAL	BUYING REFERENCE GUIDE		
					PRODUCT	CLEAR LENS	BLACK LENS
909-005	Clear	3.4 in. x 2.9 in. x 1.4 in. (87 mm x 73 mm x 34.5 mm)			709-511	909-005	909-009
909-009	Black				709-533	909-005	909-009
909-015	Clear	5.6 in. x 4.5 in. x 1.6 in.			709-541	909-015	909-019
909-019	Black	(142.22 mm x 115 mm x 41.28 mm)			709-557	909-035	909-039
909-025	Clear	3.7 in. x 1.1 in.	LENS COVER	PC	709-561	909-035	909-039
909-029	Black	(94 mm x 27 mm)			709-571	909-015	909-019
909-035	Clear	7.2 in. x 1.3 in.			709-591	909-025	909-029
909-039	Black	(182.8 mm x 32.4 mm)			709-613	909-015	909-019
909-045	Clear	9.2 in. x 1.5 in.			709-733	909-015	909-019
909-049	Black	(234.2 mm x 38.5 mm)			709-861	909-045	909-049

LIGHT BAR LENS COVER



909-105
Clear



909-115
Clear



909-125
Clear



909-109
Black



909-119
Black



909-129
Black

ACCESSORIES	COLOR	DIMENSION		DESCRIPTION	MATERIAL
909-105	Clear	153 mm x 85 mm x 30 mm	203 mm x 85 mm x 30 mm	LENS COVER	PC
909-109	Black				
909-115	Clear				
909-119	Black				
909-125	Clear				
909-129	Black				

BUYING REFERENCE GUIDE		
PRODUCT	CLEAR LENS	BLACK LENS
709-011	1x 909-125	1x 909-129
709-021	2x 909-125	2x 909-129
709-031	3x 909-125	3x 909-129
709-041	4x 909-125	4x 909-129
709-107	1x 909-105	1x 909-109
709-117	2x 909-105	2x 909-109
709-127	2x 909-105 + 1x 909-115	2x 909-109 + 1x 909-119
709-137	5x 909-105	5x 909-109
709-147	5x 909-105	5x 909-109
709-157	6x 909-105	6x 909-109
709-161	5x 909-105	5x 909-109

BUYING REFERENCE GUIDE		
PRODUCT	CLEAR LENS	BLACK LENS
709-171	5x 909-115	5x 909-119
709-181	6x 909-115	6x 909-119
709-207	2x 909-105	2x 909-109
709-227	5x 909-105	5x 909-109
709-237	5x 909-115	5x 909-119
709-247	6x 909-115	6x 909-119
709-251	2x 909-105	2x 909-109
709-261	2x 909-105 + 1x 909-115	2x 909-109 + 1x 909-119
709-271	5x 909-105	5x 909-109
709-281	5x 909-115	5x 909-119
709-291	6x 909-115	6x 909-119

WIRING AND ACCESSORIES

WIRING

J-LITE
OFF-ROAD

	709-901			
	DESCRIPTION	Female "DT" plug		
	709-903	DIMENSION	8 in.	WATTS
	DESCRIPTION	150 Watts or less		
	709-906	DIMENSION	13.5 in.	WATTS
	DESCRIPTION	150 Watts to 300 Watts		
	709-907	DIMENSION	8 in.	WATTS
	DESCRIPTION	150 Watts or less		
	709-911	DIMENSION	120 in.	WATTS
	DESCRIPTION	150 Watts or less		
	709-916	DIMENSION	120 in.	WATTS
	DESCRIPTION	150 Watts or less		
	709-931	DIMENSION	20 in.	WATTS
	DESCRIPTION	150 Watts to 300 Watts		
	709-936	DIMENSION	20 in.	WATTS
	DESCRIPTION	150 Watts to 300 Watts		

	709-941			
	DESCRIPTION	Single wiring harness with male "High Power" plug		
	DIMENSION	120 in.	WATTS	150 Watts to 300 Watts
	709-946			
	DESCRIPTION	Dual wiring harness with male "High Power" plugs		
	DIMENSION	120 in.	WATTS	150 Watts to 300 Watts
	709-951			
	DESCRIPTION	Wiring Harness - 1 switch - 2 terminals - 1 male "DT" plug		
	DIMENSION	120 in.	WATTS	150 Watts or less
	709-953			
	DESCRIPTION	Wiring Harness - 1 switch - 2 terminals- 2 male "DT" plugs		
	DIMENSION	120 in.	WATTS	150 Watts or less
	709-955			
	DESCRIPTION	Wiring Harness - 1 switch - 2 terminals - 1 male "ATP" plug		
	DIMENSION	120 in.	WATTS	150 Watts to 300 Watts
	709-957			
	DESCRIPTION	Wiring Harness - 1 switch - 2 terminals - 2 male "ATP" plugs		
	DIMENSION	120 in.	WATTS	150 Watts to 300 Watts
	709-959			
	DESCRIPTION	Wiring Harness - 2 switches - 2 terminals - 3 male "PDT" plugs. Compatibility: 709-851, 709-861		
	DIMENSION	120 in.	WATTS	150 Watts to 300 Watts

INDEX											
PART#	PAGE										
709-001	16		709-317	5		709-621	25		709-763	21	
709-003			709-327			709-623			709-946	39	
709-011	15		709-337			709-631	27		709-951		
709-021			709-347			709-633			709-953		
709-031			709-357			709-651	18		709-955		
709-041			709-501	28		709-652			709-957		
709-107	7		709-503			709-653			709-959		
709-117			709-511	26		709-663	30		909-005	36	
709-127			709-521			709-673	29		909-009		
709-137			709-533	28		709-682	19		909-015		
709-147			709-541	34		709-691	32		909-019		
709-157			709-557	23		709-693			909-025		
709-161	9		709-561	21		709-703	31		909-029		
709-171			709-571	33		709-713	20		909-035		
709-181			709-581	20		709-723	32		909-039		
709-207	11		709-591	18		709-733	33		909-045		
709-217			709-601	31		709-741	19		909-049		
709-227			709-603			709-753	23		709-901	38	
709-237			709-613	34		709-903			709-903		
709-247						709-906			709-906		
709-251	13					709-907			709-907		
709-261						709-911			709-911		
709-271						709-916			709-916		
709-281						709-931			709-931		
709-291						709-936			709-936		

LIMITED WARRANTY

The responsibility of Jimexs inc. is limited to the warranties offered by its suppliers. Jimexs inc. is not responsible for damages direct or indirect or indirect labour costs in the result of the replacement of a product.

This limited warranty is the only one given by Jimexs inc. The products illustrated in this catalogue are not warrantied by Jimexs inc.

If any information on application or installation are not clear or missing, it is the client's responsibility to request this information from Jimexs or its suppliers.

No Jimexs inc. employees are authorized to give any kind of warranty on behalf of Jimexs inc. on the products illustrated in this catalogue or any products sold by Jimexs inc.

J-LITE OFF-ROAD DISPLAY AVAILABLE.

CONTACT US FOR MORE DETAILS.



J-LITE




OFF-ROAD

WWW.JLITE-OFFROAD.COM



J-LITE OFF-ROAD

www.jlite-offroad.com

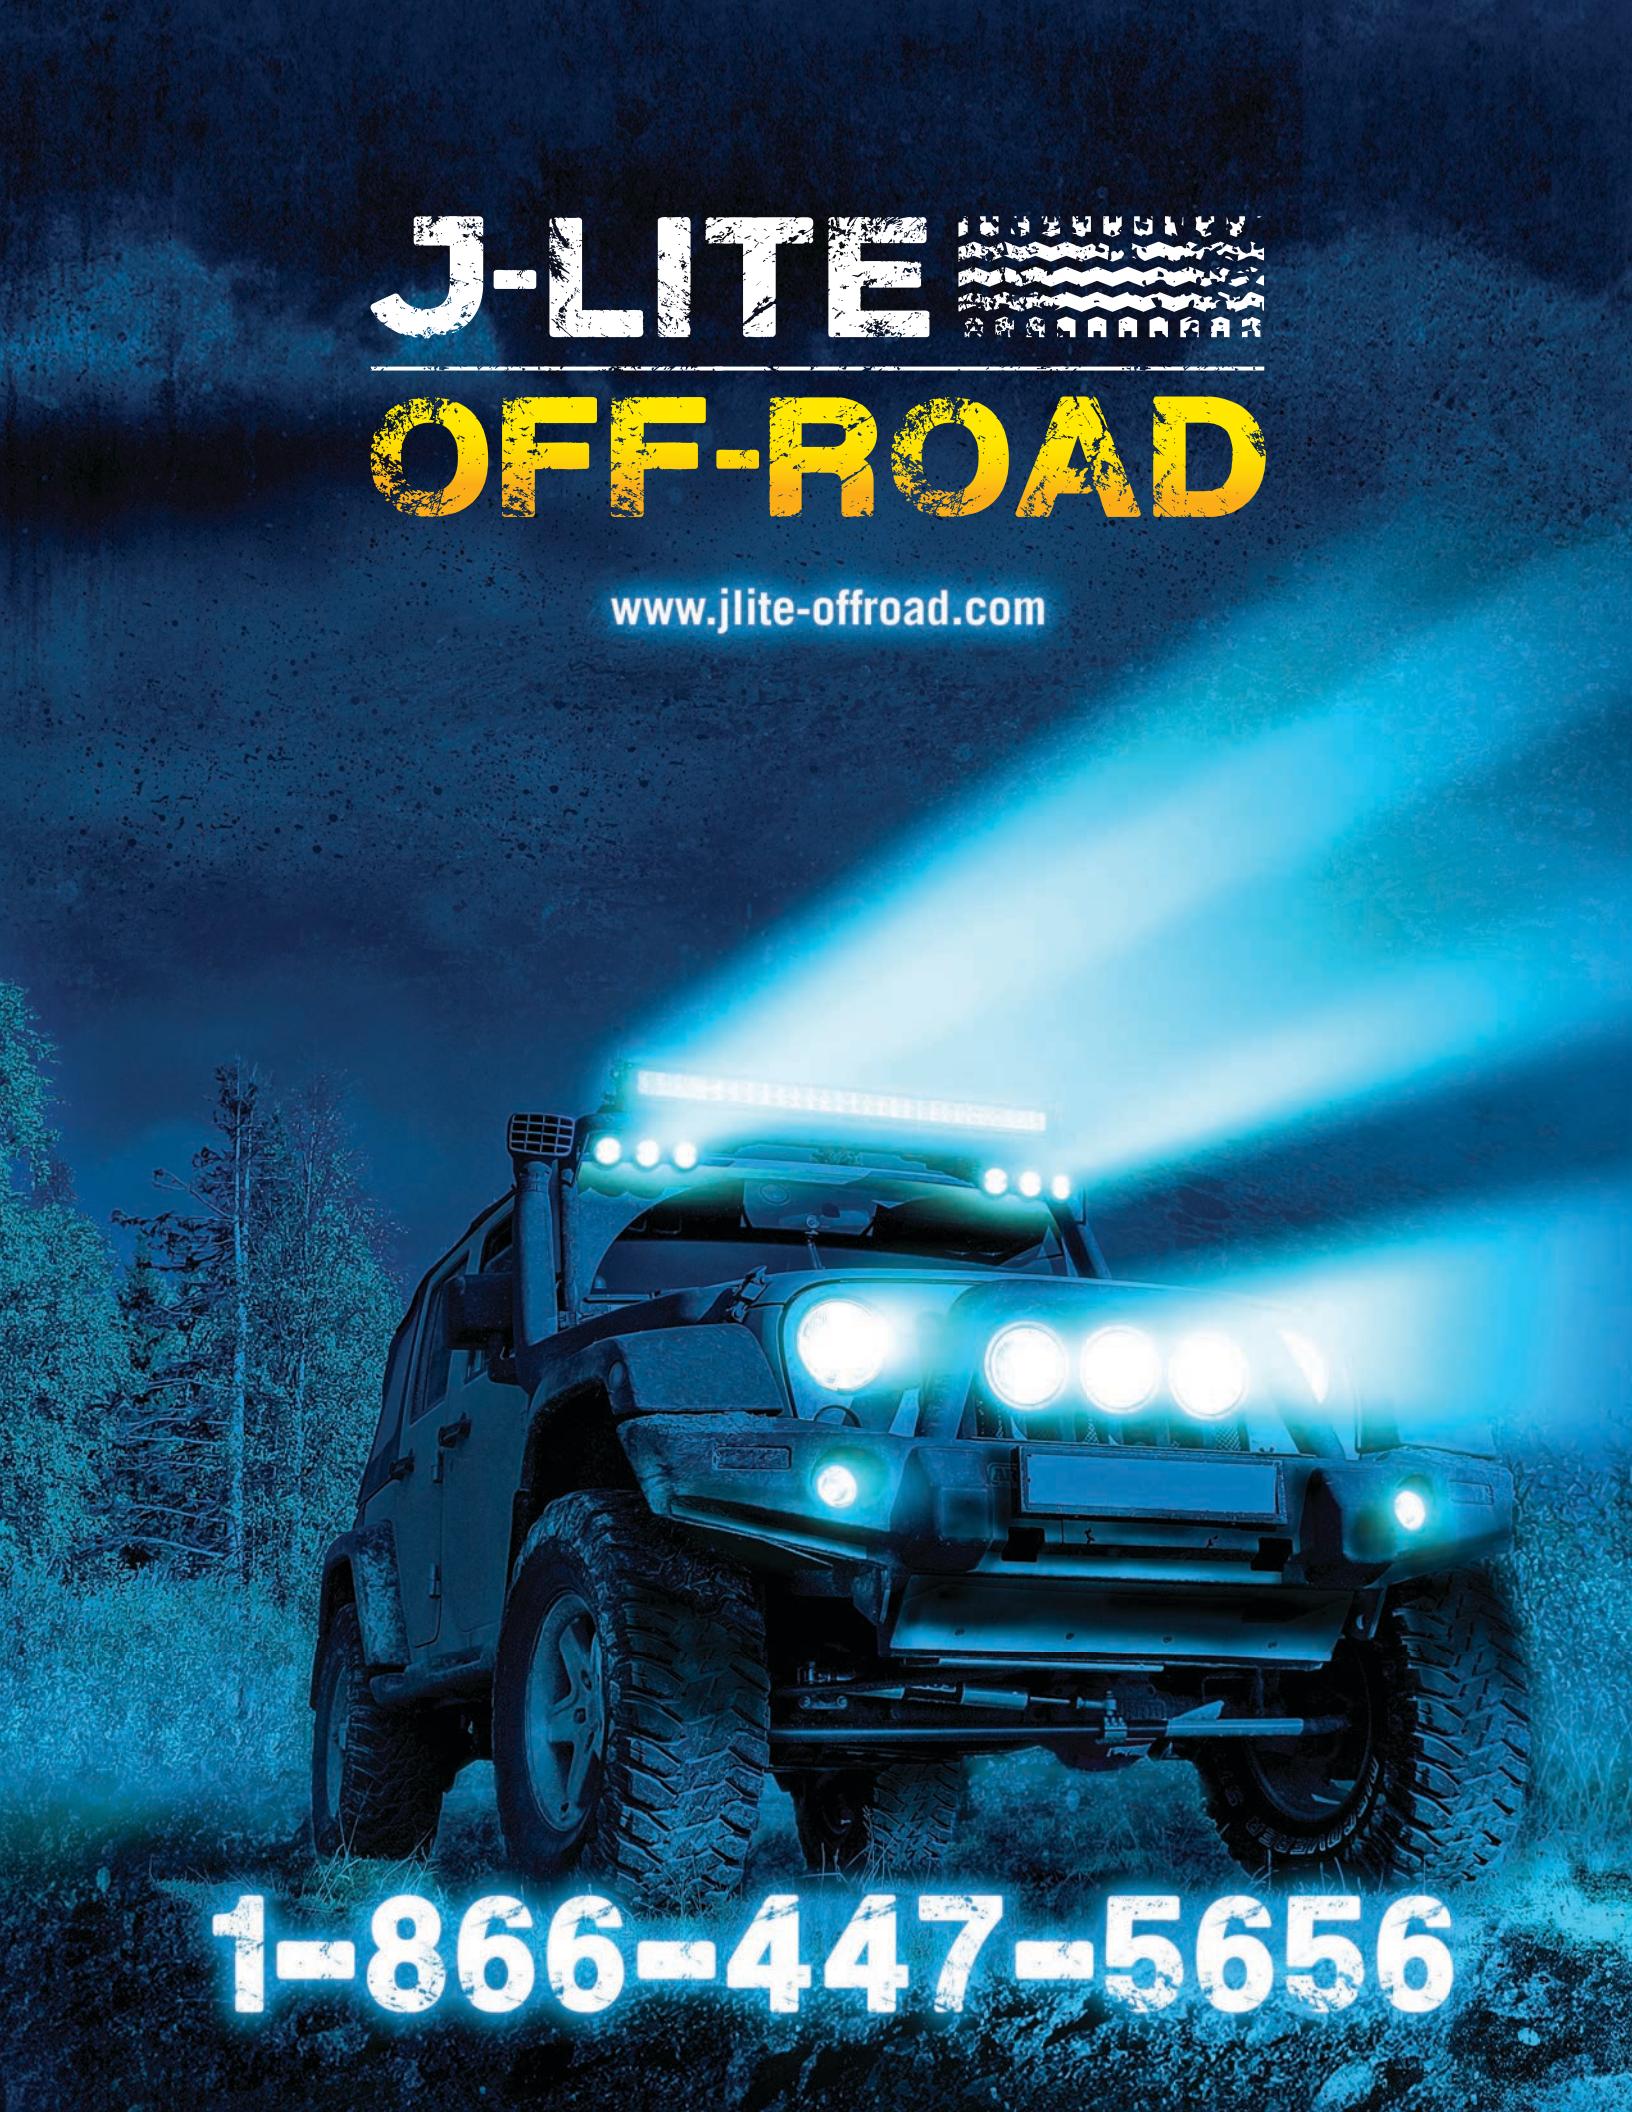

1-866-447-5656